

Geometric Model of Camera

Dr. Gerhard Roth

COMP 4900D

Winter 2012

Similar Triangles

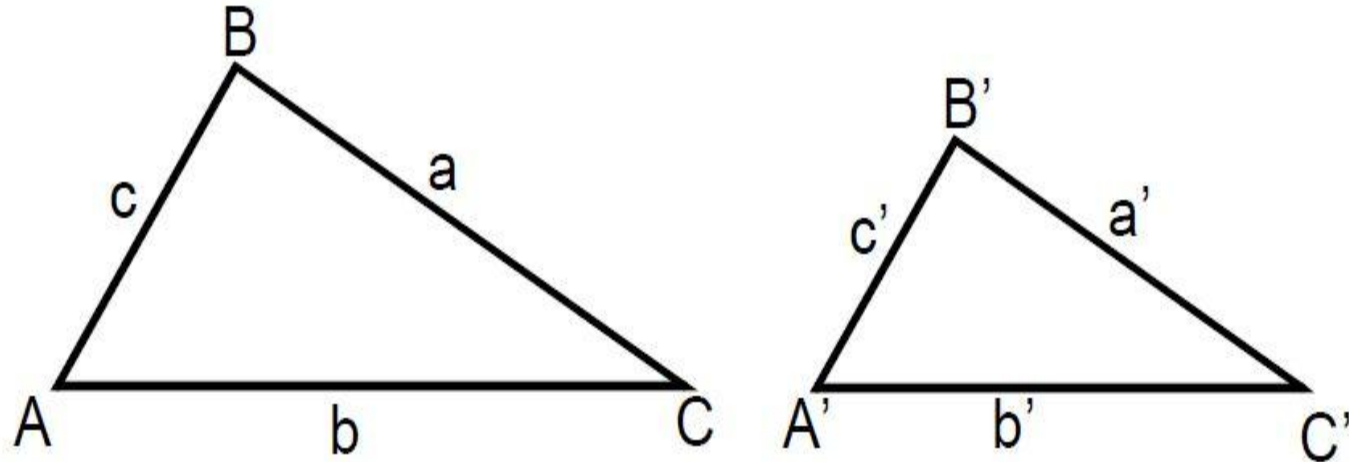



property (i): corresponding angles are equal
($A = A'$ and $B = B'$ and $C = C'$)

property (ii): corresponding sides have proportional lengths

$$\left(\frac{a}{a'} = \frac{b}{b'} = \frac{c}{c'} \right)$$

Geometric Model of Camera


Perspective projection

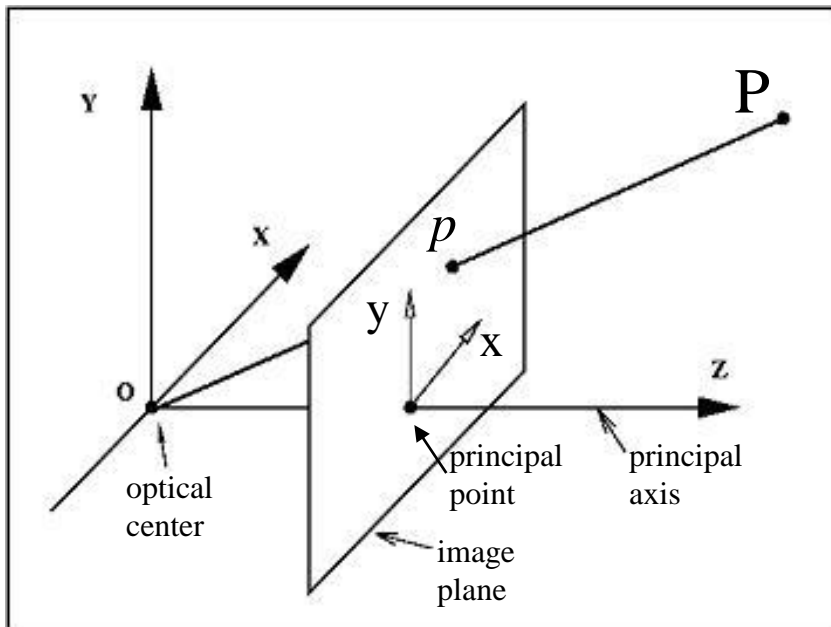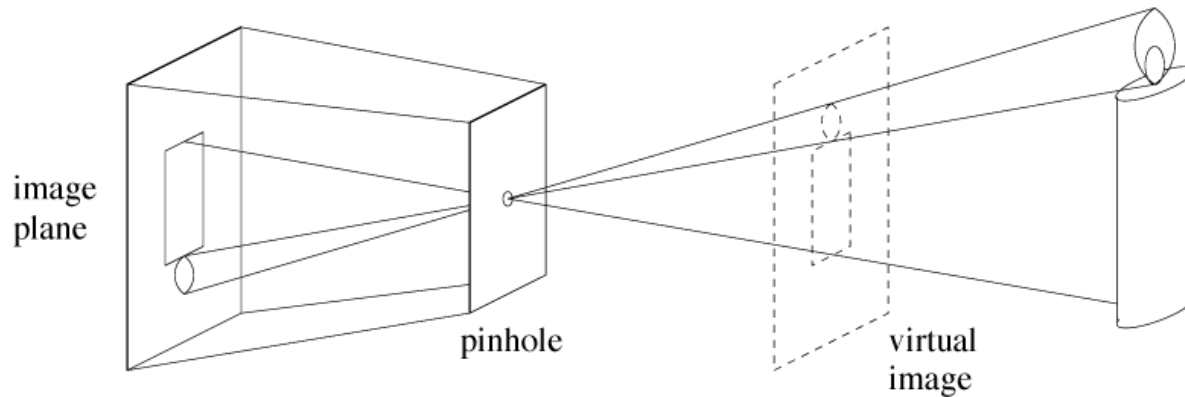


$$P(X,Y,Z) \rightarrow p(x,y)$$

$$x = f \frac{X}{Z} \quad y = f \frac{Y}{Z}$$


Parallel lines aren't...

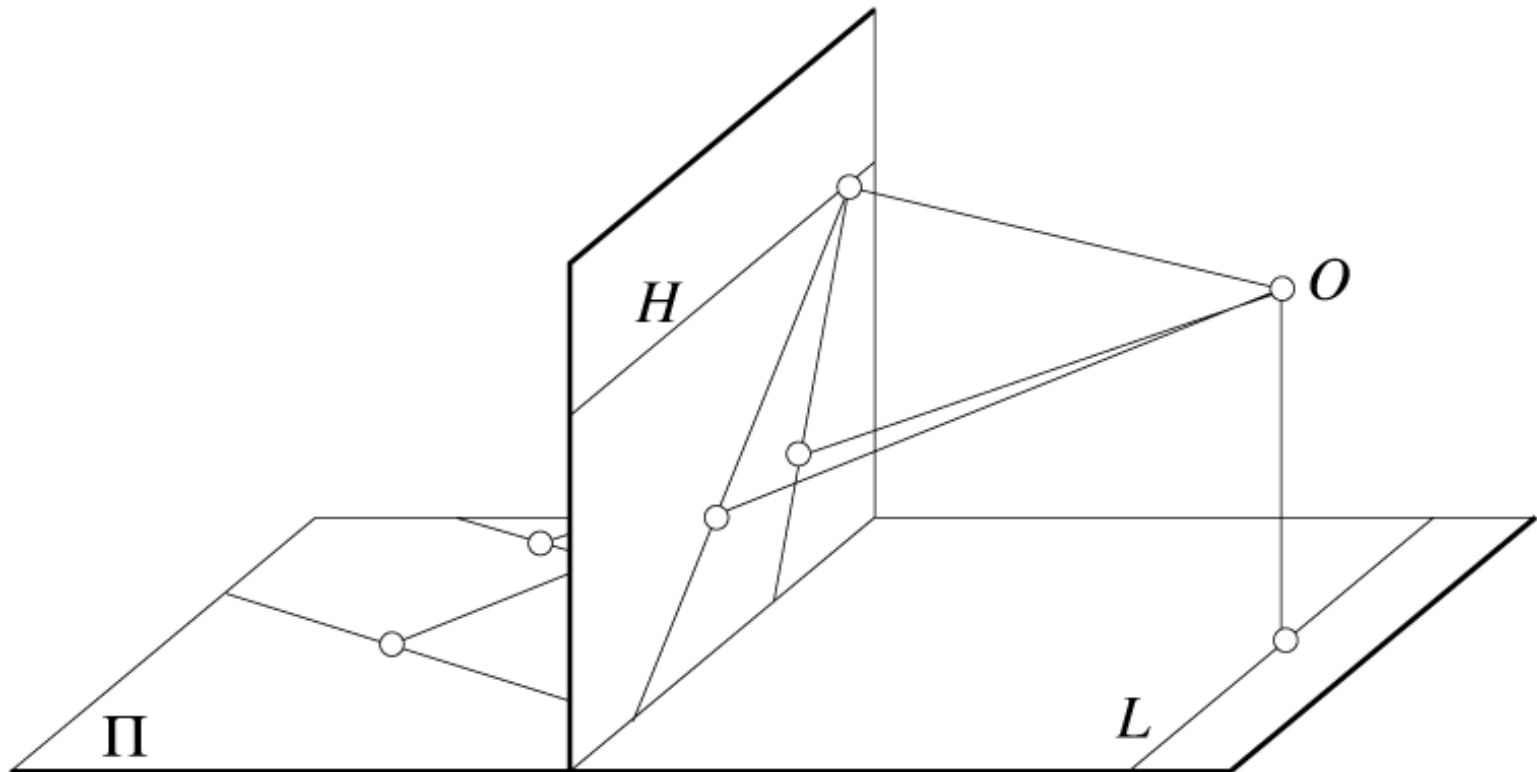

Lengths can't be trusted...

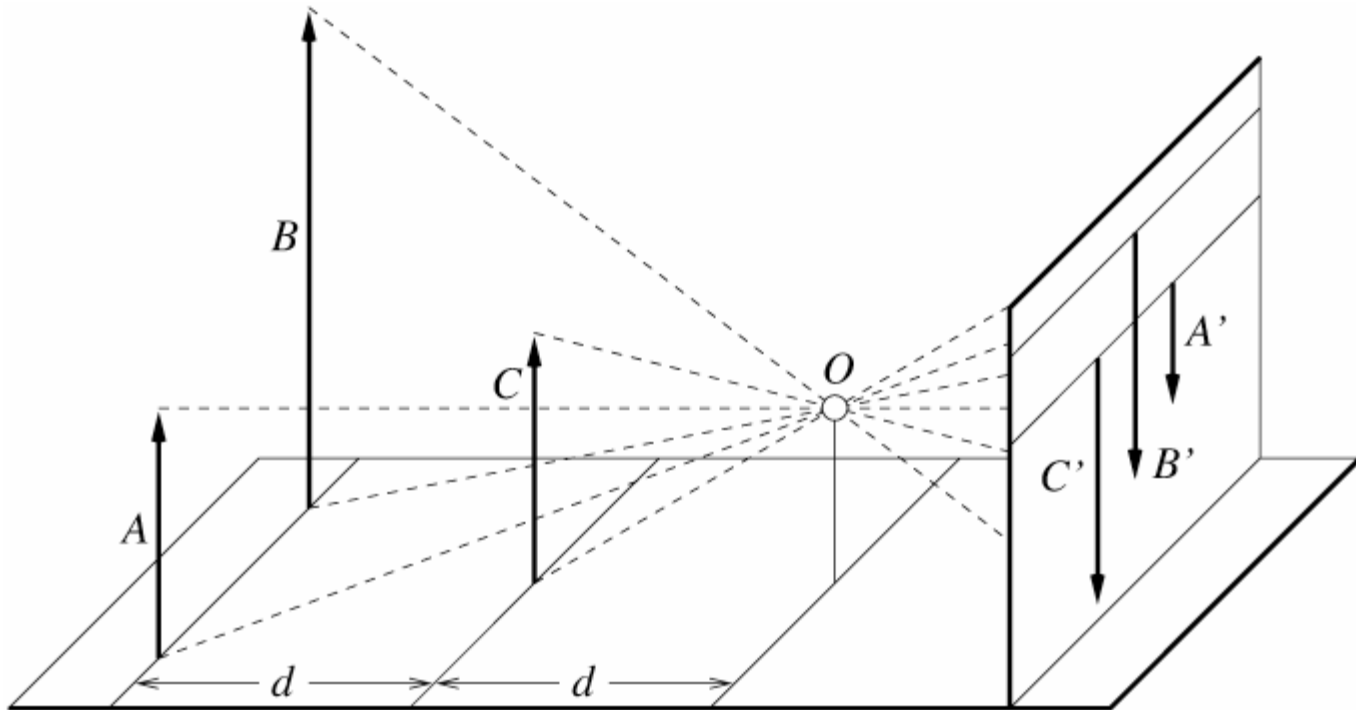

Coordinate Transformation – 2D

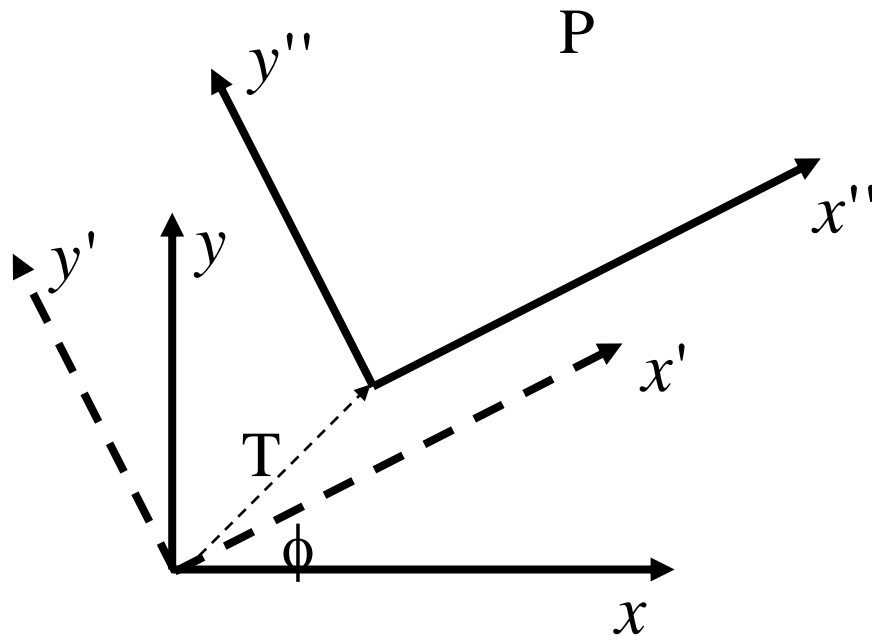

Rotation and Translation

$$p' = \begin{bmatrix} p_x' \\ p_y' \end{bmatrix} = \begin{bmatrix} \cos \phi & \sin \phi \\ -\sin \phi & \cos \phi \end{bmatrix} \begin{bmatrix} p_x \\ p_y \end{bmatrix}$$

$$p'' = \begin{bmatrix} p_x' \\ p_y' \end{bmatrix} + \begin{bmatrix} T_x \\ T_y \end{bmatrix} = \begin{bmatrix} \cos \phi & \sin \phi \\ -\sin \phi & \cos \phi \end{bmatrix} \begin{bmatrix} p_x \\ p_y \end{bmatrix} + \begin{bmatrix} T_x \\ T_y \end{bmatrix}$$

Homogeneous Coordinates

Go one dimensional higher:

$$\begin{bmatrix} x \\ y \end{bmatrix} \rightarrow \begin{bmatrix} wx \\ wy \\ w \end{bmatrix} \qquad \begin{bmatrix} x \\ y \\ z \end{bmatrix} \rightarrow \begin{bmatrix} wx \\ wy \\ wz \\ w \end{bmatrix}$$

w is an arbitrary non-zero scalar, usually we choose 1.

From homogeneous coordinates to Cartesian coordinates:

$$\begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} \rightarrow \begin{bmatrix} x_1 / x_3 \\ x_2 / x_3 \end{bmatrix} \qquad \begin{bmatrix} x_1 \\ x_2 \\ x_3 \\ x_4 \end{bmatrix} \rightarrow \begin{bmatrix} x_1 / x_4 \\ x_2 / x_4 \\ x_3 / x_4 \end{bmatrix}$$

2D Transformation with Homogeneous Coordinates

2D coordinate transformation:

$$p'' = \begin{bmatrix} \cos \phi & \sin \phi \\ -\sin \phi & \cos \phi \end{bmatrix} \begin{bmatrix} p_x \\ p_y \end{bmatrix} + \begin{bmatrix} T_x \\ T_y \end{bmatrix}$$

2D coordinate transformation using homogeneous coordinates:

$$\begin{bmatrix} p_x'' \\ p_y'' \\ 1 \end{bmatrix} = \begin{bmatrix} \cos \phi & \sin \phi & T_x \\ -\sin \phi & \cos \phi & T_y \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} p_x \\ p_y \\ 1 \end{bmatrix}$$

3D Rotation Matrix

Rotate around each coordinate axis:

$$R_1(\alpha) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos \alpha & -\sin \alpha \\ 0 & \sin \alpha & \cos \alpha \end{bmatrix} \quad R_2(\beta) = \begin{bmatrix} \cos \beta & 0 & \sin \beta \\ 0 & 1 & 0 \\ -\sin \beta & 0 & \cos \beta \end{bmatrix} \quad R_3(\gamma) = \begin{bmatrix} \cos \gamma & -\sin \gamma & 0 \\ \sin \gamma & \cos \gamma & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Combine the three rotations:

$$R = R_1 R_2 R_3$$

3D rotation matrix has three parameters,
no matter how it is specified.

Rotation Matrices


- Both 2d and 3d rotation matrices have two characteristics
- They are orthogonal (also called orthonormal)

$$R^T R = I \qquad R^T = R^{-1}$$

- Their determinant is 1
- Matrix below is orthogonal but not a rotation matrix because the determinate is not 1


$$\begin{pmatrix} 1 & 0 & 0 \\ 0 & -1 & 0 \\ 0 & 0 & 1 \end{pmatrix} \longleftarrow \text{this is a reflection matrix}$$

Four Coordinate Frames

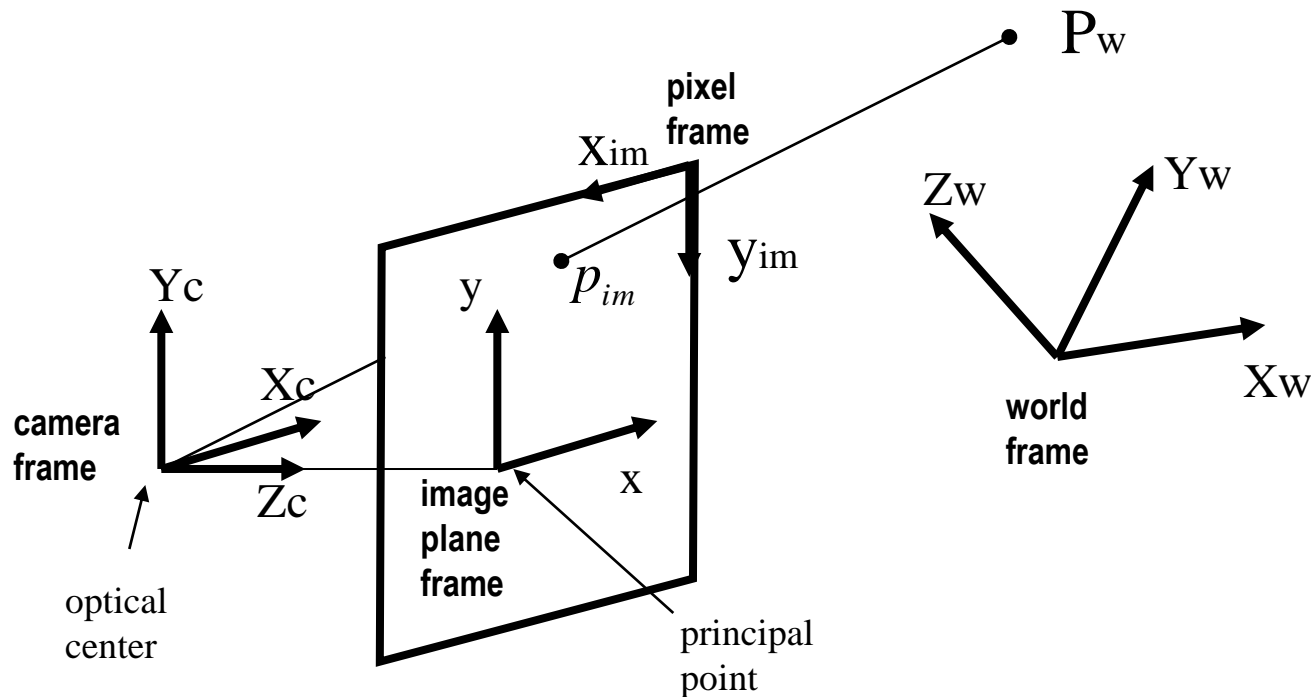

Camera model:
$$p_{im} = \begin{bmatrix} \text{transformation} \\ \text{matrix} \end{bmatrix} P_w$$

Perspective Projection

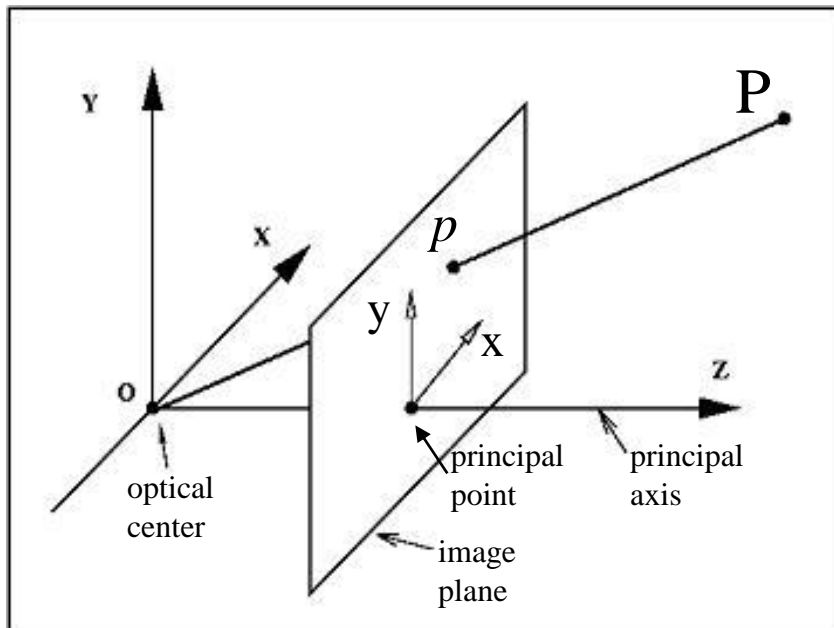

$$x = f \frac{X}{Z} \quad y = f \frac{Y}{Z}$$

These are *nonlinear*.


Using homogenous coordinate, we have a *linear* relation:

$$\begin{bmatrix} u \\ v \\ w \end{bmatrix} = \begin{bmatrix} f & 0 & 0 & 0 \\ 0 & f & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} X \\ Y \\ Z \\ 1 \end{bmatrix}$$

$$x = u / w \quad y = v / w$$

World to Camera Coordinate

Transformation between the camera and world coordinates:

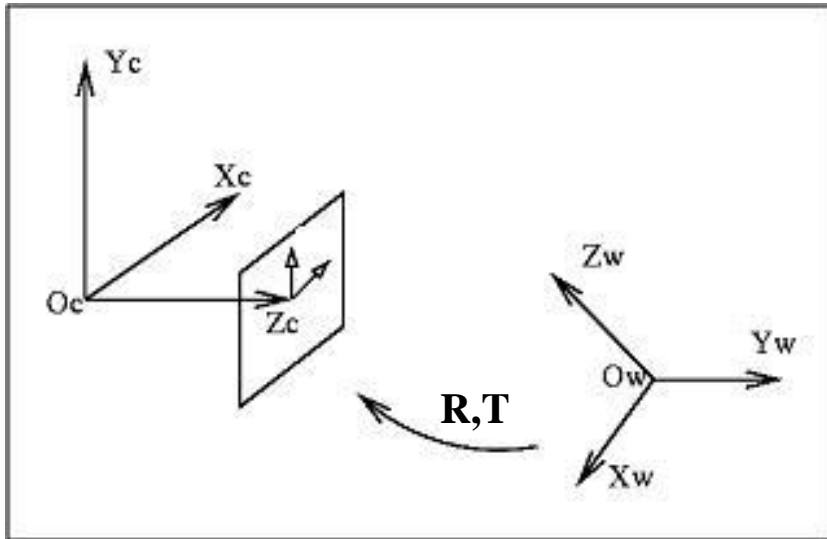


$$\mathbf{X}_c = \mathbf{R}\mathbf{X}_w + \mathbf{T}$$

$$\begin{bmatrix} X_c \\ Y_c \\ Z_c \\ 1 \end{bmatrix} = \begin{bmatrix} \mathbf{R} & \mathbf{T} \\ \mathbf{0}^T & 1 \end{bmatrix} \begin{bmatrix} X_w \\ Y_w \\ Z_w \\ 1 \end{bmatrix}$$

Camera Coordinates to Pixel Coordinates

$$x = (o_x - x_{im})s_x \quad y = (o_y - y_{im})s_y$$

s_x, s_y : pixel sizes in millimeters per pixel

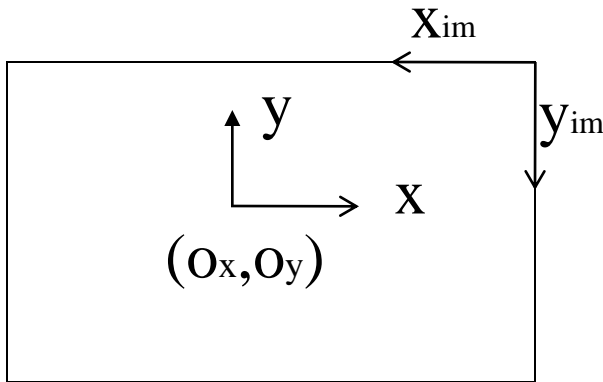

$$\begin{bmatrix} x_{im} \\ y_{im} \\ 1 \end{bmatrix} = \begin{bmatrix} -1/s_x & 0 & o_x \\ 0 & -1/s_y & o_y \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ 1 \end{bmatrix}$$

Camera co-ordinates x , and y are in millimetres

Image co-ordinates x_{im} , y_{im} , are in pixels

Center of projection o_x , o_y is in pixels

Put All Together – World to Pixel

$$\begin{aligned}
 \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} &= \begin{bmatrix} -1/s_x & 0 & o_x \\ 0 & -1/s_y & o_y \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} u \\ v \\ w \end{bmatrix} \\
 &= \begin{bmatrix} -1/s_x & 0 & o_x \\ 0 & -1/s_y & o_y \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} f & 0 & 0 & 0 \\ 0 & f & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} X_c \\ Y_c \\ Z_c \\ 1 \end{bmatrix} \\
 &= \begin{bmatrix} -1/s_x & 0 & o_x \\ 0 & -1/s_y & o_y \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} f & 0 & 0 & 0 \\ 0 & f & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} R & T \\ 0 & 1 \end{bmatrix} \begin{bmatrix} X_w \\ Y_w \\ Z_w \\ 1 \end{bmatrix} \\
 &= \begin{bmatrix} -f/s_x & 0 & o_x \\ 0 & -f/s_y & o_y \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} R & T \\ 0 & 1 \end{bmatrix} \begin{bmatrix} X_w \\ Y_w \\ Z_w \\ 1 \end{bmatrix} = K \begin{bmatrix} R & T \end{bmatrix} \begin{bmatrix} X_w \\ Y_w \\ Z_w \\ 1 \end{bmatrix}
 \end{aligned}$$

$$x_{im} = x_1 / x_3 \quad y_{im} = x_2 / x_3$$

Camera Parameters

- Extrinsic parameters define the location and orientation of the camera reference frame with respect to a world reference frame
 - Depend on the external world, so they are extrinsic
- Intrinsic parameters link pixel co-ordinates in the image with the corresponding co-ordinates in the camera reference frame
 - An intrinsic characteristic of the camera
- Image co-ordinates are in pixels
- Camera co-ordinates are in millimetres

Intrinsic Camera Parameters

$$K = \begin{bmatrix} -f / s_x & 0 & o_x \\ 0 & -f / s_y & o_y \\ 0 & 0 & 1 \end{bmatrix}$$

K is a 3x3 upper triangular matrix, called the **Camera Calibration Matrix**.

There are five intrinsic parameters:

- (a) The pixel sizes in x and y directions s_x, s_y in millimeters/pixel
- (b) The focal length f in millimeters
- (c) The principal point (o_x, o_y) in pixels, which is the point where the optic axis intersects the image plane.

Camera intrinsic parameters

- Can write three of these parameters differently by letting $f/s_x = f_x$ and $f/s_y = f_y$
 - Then intrinsic parameters are ox, oy, f_x, f_y
 - The units of these parameters are pixels!
- In practice pixels are square ($s_x = s_y$) so that means f_x should equal f_y for most cameras
 - However, every explicit camera calibration process (using calibration objects) introduces some small errors
 - These calibration errors make f_x not exactly equal to f_y
- So in OpenCV the intrinsic camera parameters are the four following ox, oy, f_x, f_y
 - However f_x is usually very close to f_y and if this is not the case then there is a problem

Extrinsic Parameters

$$p_{im} = \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = K \begin{bmatrix} R & T \end{bmatrix} \begin{bmatrix} X_w \\ Y_w \\ Z_w \\ 1 \end{bmatrix} = M \begin{bmatrix} X_w \\ Y_w \\ Z_w \\ 1 \end{bmatrix}$$


$[R|T]$ defines the **extrinsic parameters**.

The 3x4 matrix $M = K[R|T]$ is called the **projection matrix**.

It takes 3d points in the world co-ordinate system and maps them to the appropriate image co-ordinates in pixels

Effect of change in focal length

Small f is wide angle, large f is telescopic


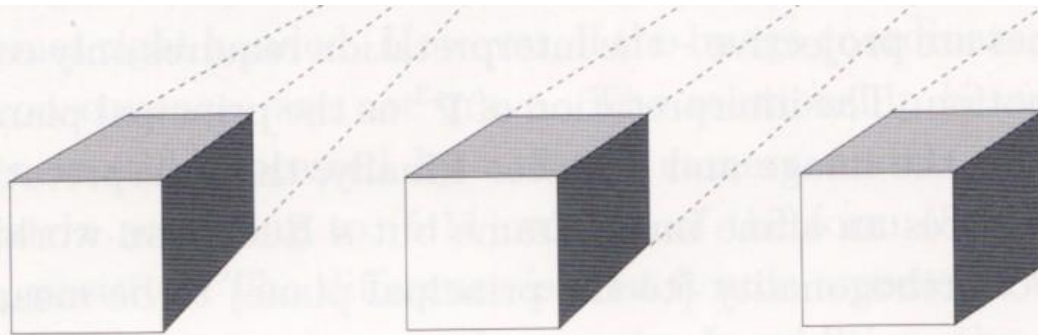


perspective

weak perspective


increasing focal length

increasing distance from camera

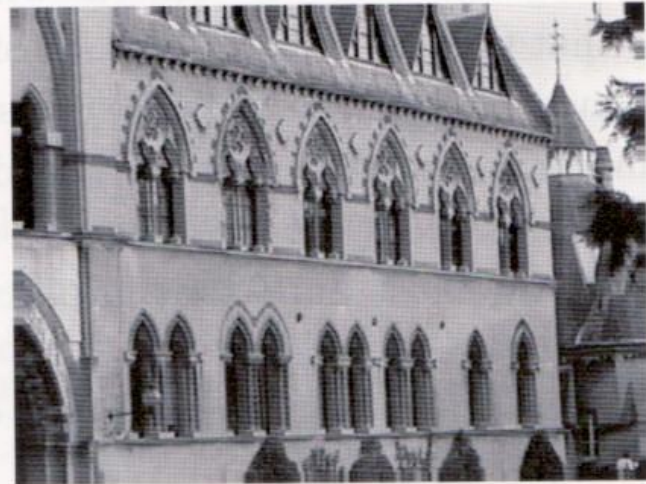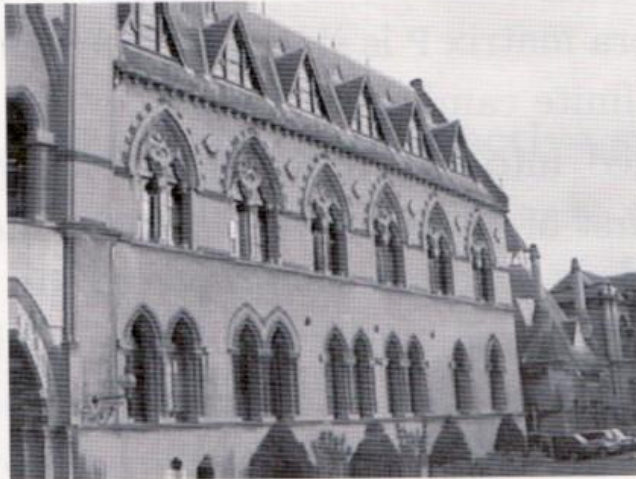


Orthographic Projection

Orthographic Projection

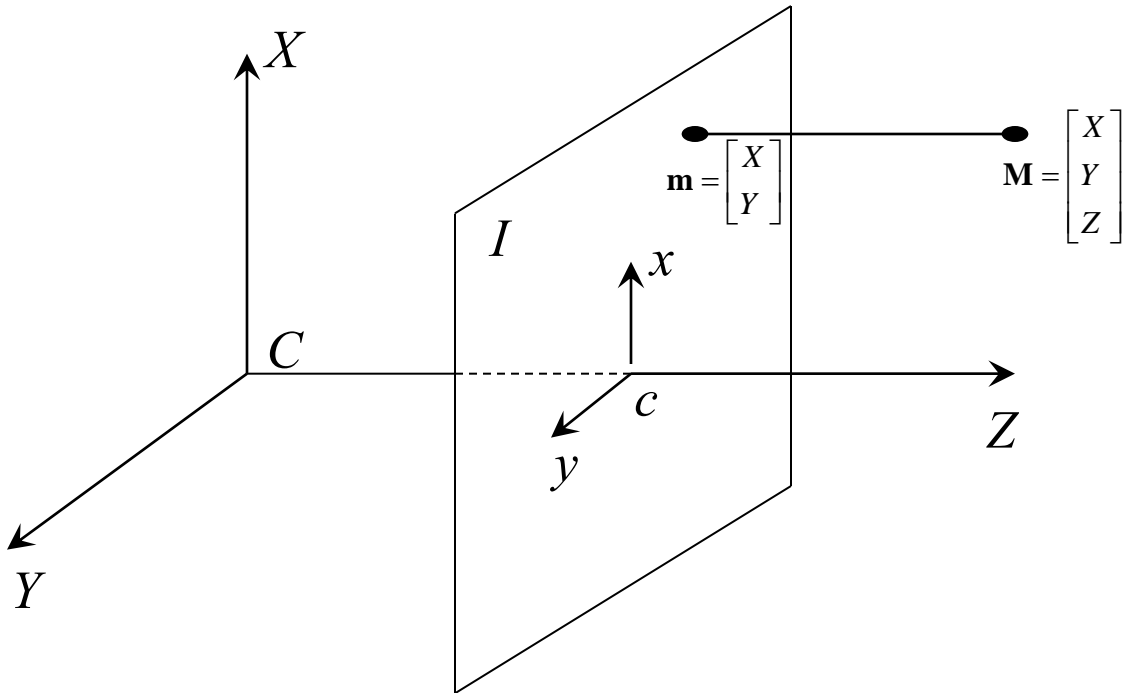

Orthographic Projection

Orthographic Projection

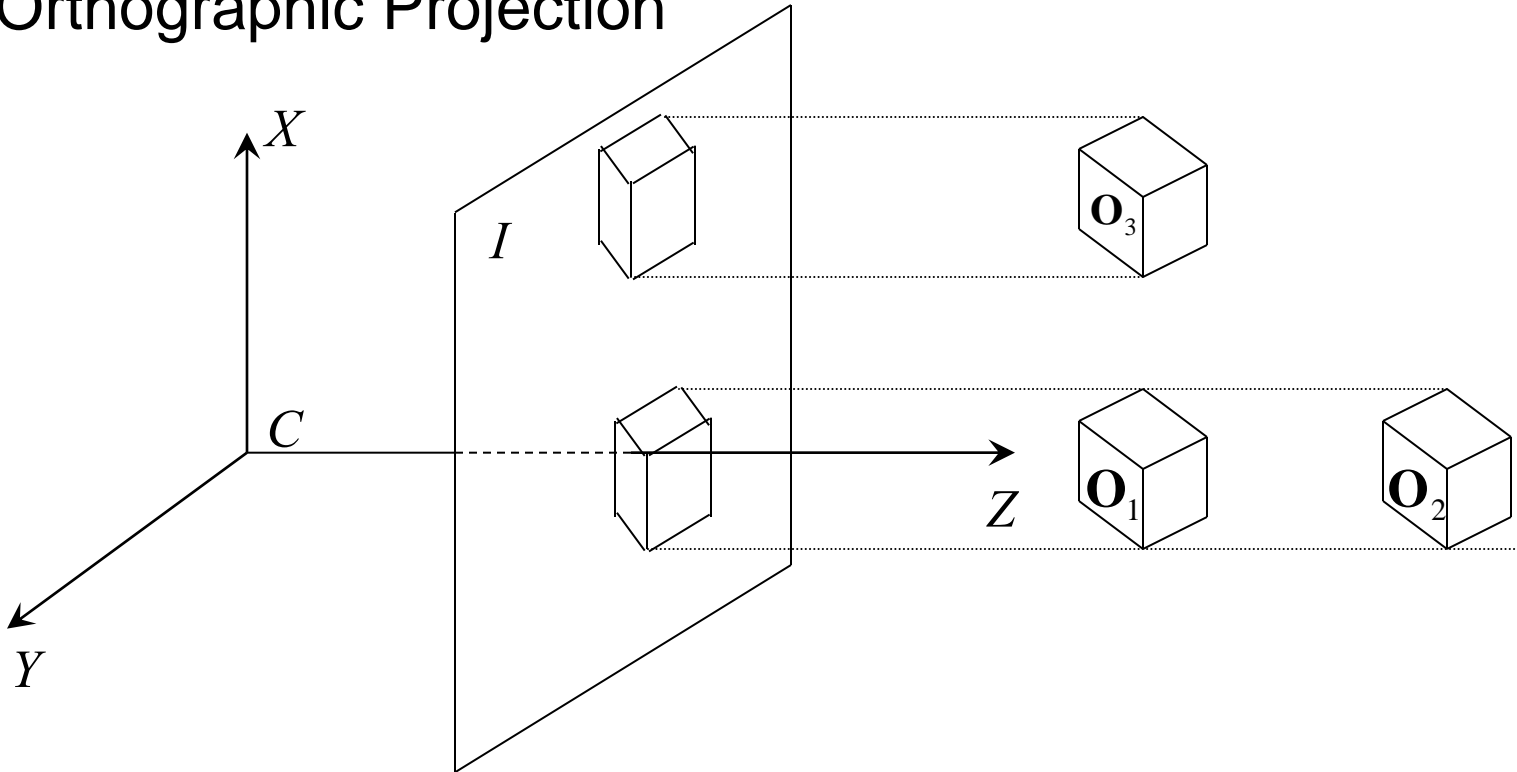

Weak Perspective Model

Assume the relative distance between any two points along the principal axis is much smaller ($1/20^{\text{th}}$ at most) than the average distance \bar{Z}

Then the camera projection can be approximated as:


$$x = f \frac{X}{Z} \approx \frac{f}{\bar{Z}} X$$

$$y = f \frac{Y}{Z} \approx \frac{f}{\bar{Z}} Y$$

This is the **weak-perspective** camera model.
Sometimes called scaled orthography.

Weak Perspective Projection


Two step projection:

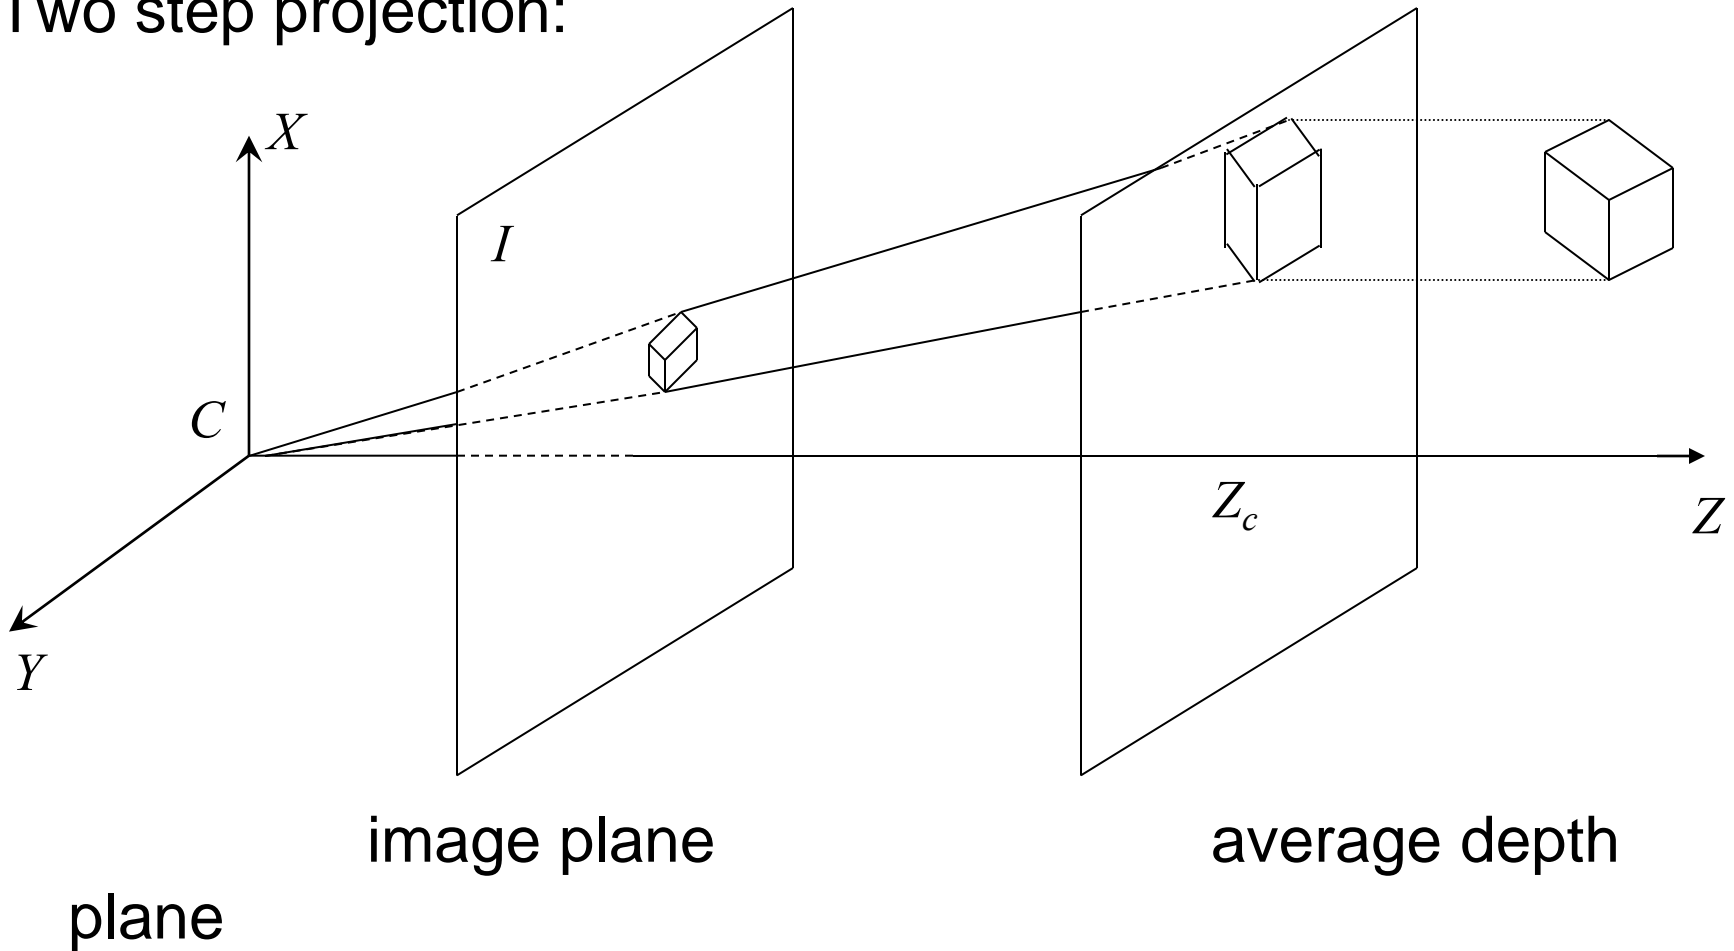

Weak Perspective

158

5 Camera Models

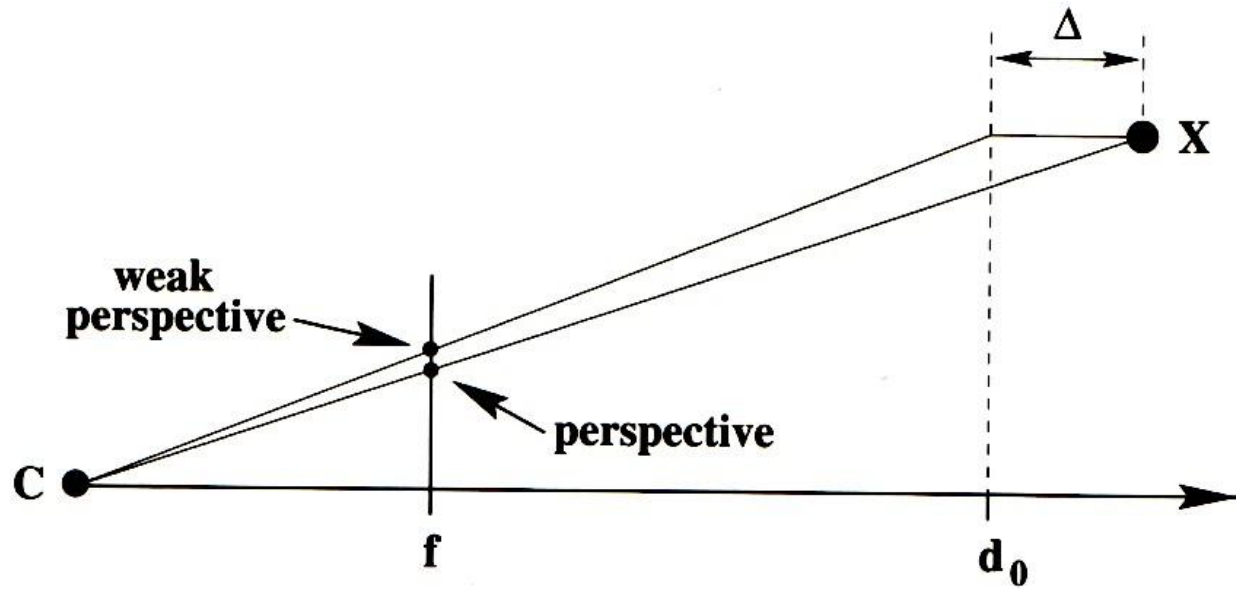


Impact of different projections


- Perspective projections
 - Parallel lines in world are not parallel in the image
 - Object projection gets smaller with distance from camera
- Weak perspective projection
 - Parallel lines in the world are parallel in the image
 - Object projection gets smaller with distance from camera
- Orthographic projection
 - Parallel lines in the world are parallel in the image
 - Object projection is unchanged with distance from camera

Image distortion due to optics

- Radial distortion which depends on radius r , distance of each point from center of image
- $r^2 = (x - o_x)^2 + (y - o_y)^2$

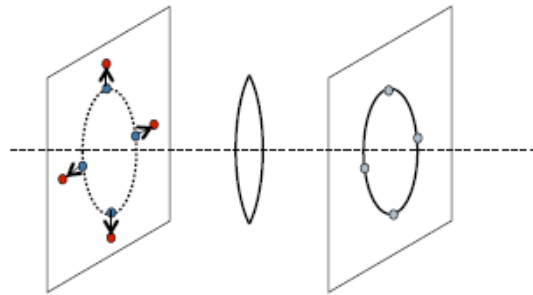

Radial distortion

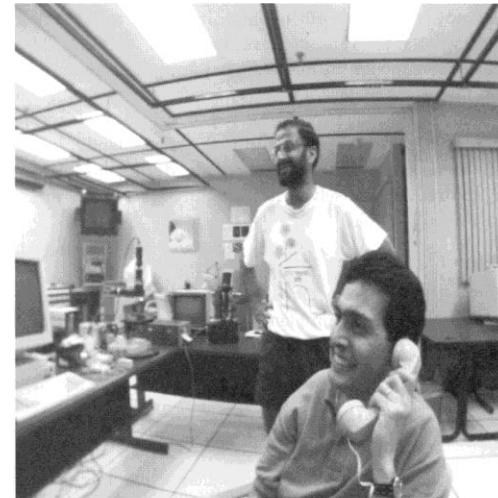

$$x_{\text{corrected}} = x(1 + k_1 r^2 + k_2 r^4 + k_3 r^6)$$

$$y_{\text{corrected}} = y(1 + k_1 r^2 + k_2 r^4 + k_3 r^6)$$

Correction uses three parameters, k_1, k_2, k_3

Correcting Radial Distortions




Tangential Distortion

- Lens not exactly parallel to the image plane

$$x_{\text{corrected}} = x + [2p_1y + p_2(r^2 + 2x^2)]$$

$$y_{\text{corrected}} = y + [p_1(r^2 + 2y^2) + 2p_2x]$$

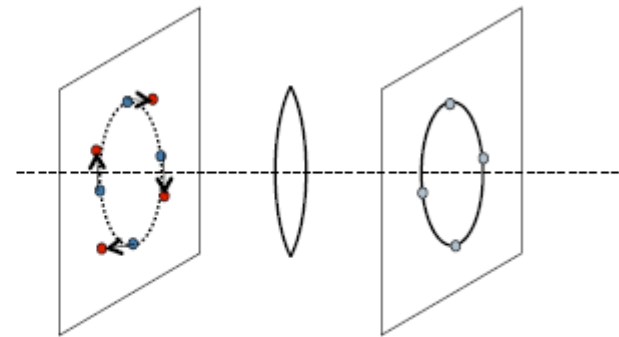

Tangential distortion

- Correction uses two parameter p_1 , p_2
- Both types of distortion are removed (image is un-distorted) and only then does standard calibration matrix K apply to the image
- Camera calibration computes both K and these five distortion parameters

How to find the camera parameters

- Can use the EXIF tag for any digital image
 - Has focal length f in millimeters but not the pixel size
 - But you can get the pixel size from the camera manual
 - There are only a finite number of different pixels sizes because number of sensing element sizes is limited
 - If there is not a lot of image distortion due to optics then this approach is sufficient (only linear calibration)
- Can perform explicit camera calibration
 - Put a calibration pattern in front of the camera
 - Take a number of different pictures of this pattern
 - Now run the calibration algorithm (different types)
 - Result is intrinsic camera parameters (linear and non-linear) and the extrinsic camera parameters of all the images